

TA330 LINEAR DRIVE

FOR BRUSHLESS SERVO MOTORS

BENEFITS

- True Class-AB power stage
- Zero crossover distortion
- Digital on-the-fly gain control (DTS)
- Minimizes Hall Sensors torque ripple
- Integrated microprocessor for system health reporting through a serial interface
- Very low electrical noise
- Sinusoidal or trapezoidal operation

APPLICATIONS

- High and very high resolution staging
- Linear motor stages
- High inertia mismatched stages
- Low inductance motors



TECHNICAL SPECIFICATIONS

ELECTRICAL

SUPPLY VOLTAGE

Bipolar: $\pm 24V$ to $\pm 75V$

EQUIVALENT MOTOR VOLTAGE

$\pm 32V$ to $\pm 134V^*$

AUXILIARY 24v SUPPLY

$24V \pm 5\%$ @1A max

MAXIMUM OUTPUT CURRENT

See SOA chart

FAULT

TTL Level 0 or 1

/ENABLE

TTL Level 0 or 1

COMMAND INPUT

$\pm 10V$ ($\pm 12V$ max)

TORQUE GAIN

0.6 A/V to 1.8 A/V

BANDWIDTH

5.0 kHz **

MECHANICAL

LENGTH: 14.90 in (37.85 cm)

WIDTH: 7.69 in (19.53 cm)

HEIGHT: 4.70 in (11.94 cm)

WEIGHT: 13.5 lbs (6.12 kg)

CONNECTIONS

COMMAND SIGNALS (J3)

10-Pin quick connect

MOTOR SIGNALS (J5)

4-Pin Terminal block, plug

HALL SIGNALS (J4)

5-Pin quick connect

AUXILIARY 24V SUPPLY (J1)

3-Pin Terminal block, plug

SERIAL MONITOR (J2)

6-Pin, Plug

MOTOR POWER (J6)

4-Pin Terminal block, plug

ENVIRONMENTAL

MAXIMUM ALTITUDE

6,560FT (2000M)

TEMPERATURE (ambient)

Normal operation: $5^{\circ}C$ to $+40^{\circ}C$

Storage: $-40^{\circ}C$ to $+70^{\circ}C$

Heatsink: $+70^{\circ}C$ maximum

HEAT DISSIPATION

See SOA chart

AIRFLOW

Internal fans, variable speed, thermally controlled

HUMIDITY

Operating: 10% to 70%, non-condensing

Storage: 10% to 95%, non-condensing

POLLUTION DEGREE 2

*dependent upon motor load

**into ~ 1mH load


(mating connectors supplied with drive)

(serial monitor cable J2 sold separately)


CONSISTENT LINEAR VOLTAGE OUTPUT WITH NO VOLTAGE DEADBAND AROUND ZERO POINT

The Trust Automation TA330 Linear Drive is a fourth generation drive in Trust Automation's continually expanding product line. This linear three-phase servo motor drive is a true class AB amplifier and is the most up to date technology in the industry for sinusoidal motor control. The TA330 provides an optional external 24V input to maintain serial communications without main power. The TA330 is a highly configurable device with four common configuration modes. The TA330 will drive one brushless motor using external sinusoidal commutation. It can also use Hall Effect sensor feedback for smooth internally commutated trapezoidal operation. The TA330 also supports one or two brush or voice coil type motors as well as driving a traditional two coil stepper motor under sinusoidal control.

SAFE OPERATING AREA

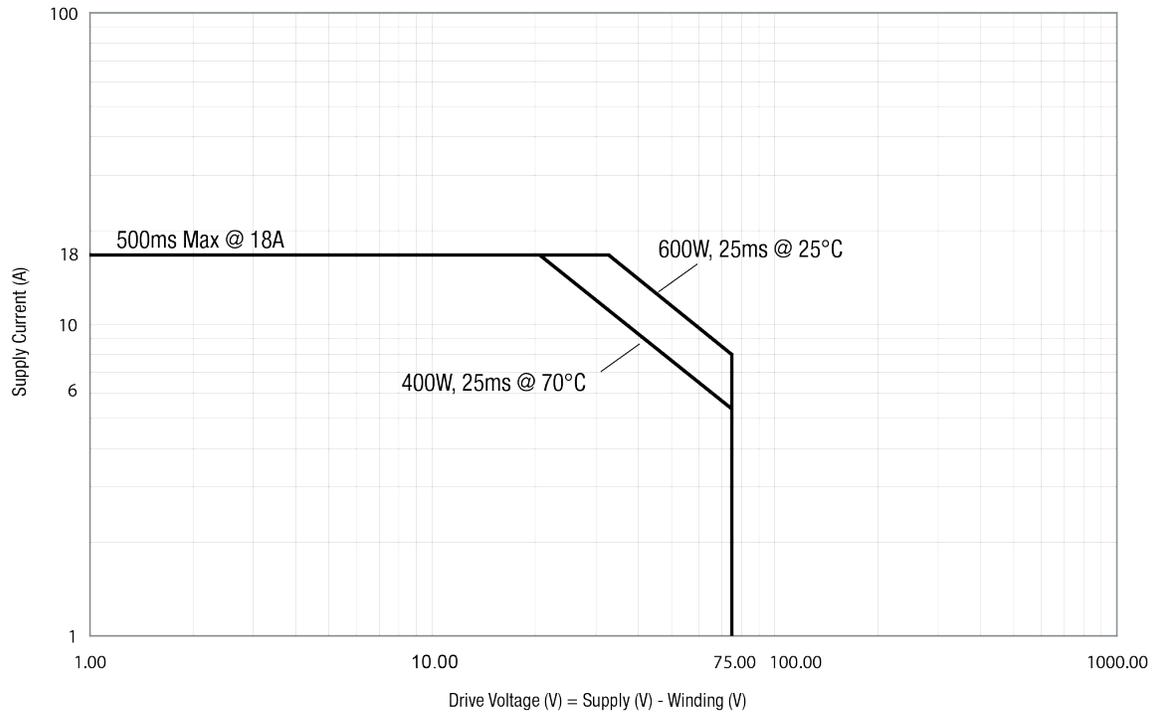

MECHANICAL DRAWING

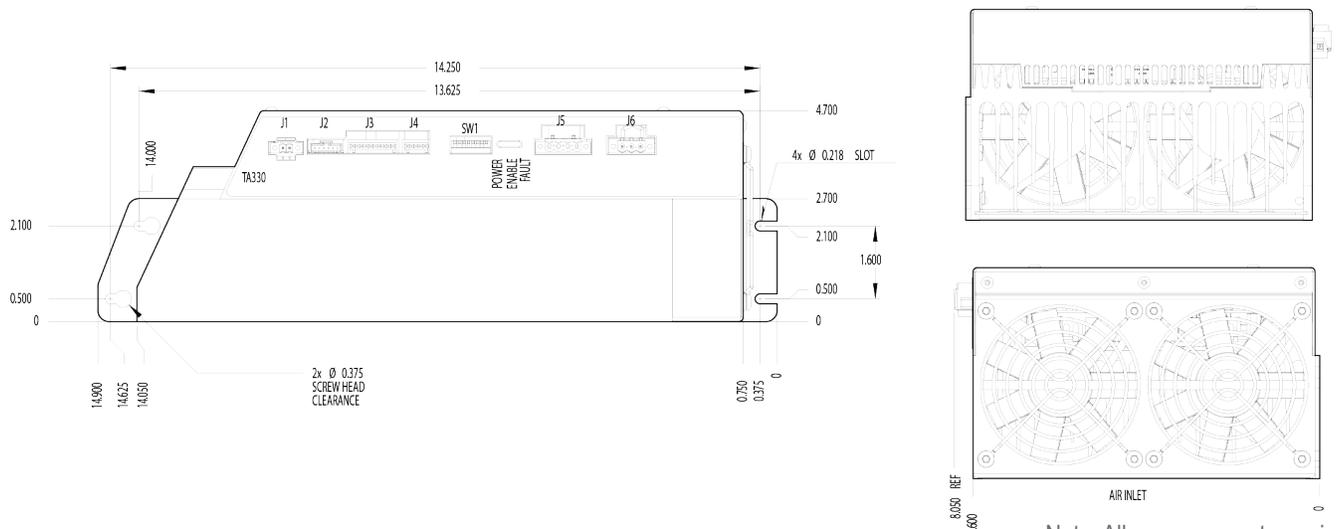

Note: All measurements are in inches